




# STANDARD SCI SCBA CYLINDERS

## Features & Benefits

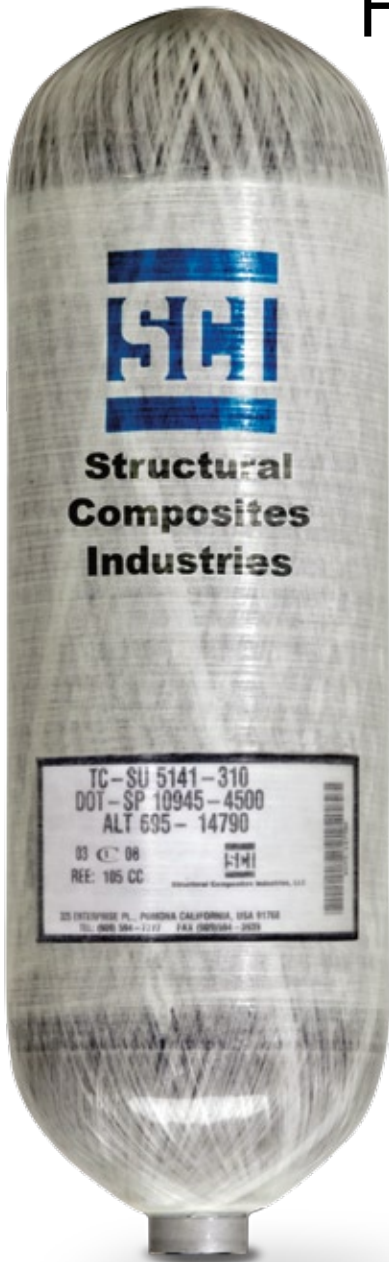

- Save 30% to 60% off SCBA manufacturer cylinder prices
- Available in 10, 15, 30, 45 & 60 minute durations
- Available in 2216, 3000 & 4500 PSI models
- 15-year service life with 5-year hydrostatic testing
- Millions of units sold – all without ever experiencing a field service failure
- Improved abrasion resistance as compared to other cylinder manufacturers
- Increased fiberglass wrapping improves durability
- Meets or exceeds all Regulatory Technical Standards – DOT & TC approved
- Several models to choose from
- Custom labeling options available
- Available for all SCBAs

**Safety + Reliability + Savings = SCI**

# STANDARD SCI SCBA CYLINDERS

## Specifications



### STANDARD CYLINDER SPECIFICATIONS

Model	Approx. Duration (min.)	DOT Approval	TC Approval	PSI	Bar	Volume cu. in. (min.)	Volume liter (min.)	OD inches	OD MM (max.)	OAL inches (max.)	OAL MM (max.)	Weight LBS	Weight KG	Port
374	15	DOT-E 7277	TC 3FCM	3000	207	114	2.37	4.51	114.6	11.61	294.9	3.3	1.5	.750-16 UNF-2B
602	30	DOT-E 10945	TC SU-5141	2216	153	523	8.57	6.84	173.7	19.62	498.35	6.7	3.04	.750-16 UNF-2B
639	30	DOT-E 10945	TC SU-5141	4500	310	285	4.67	5.5	139.7	19.2	487.68	6.9	3.18	.875-14 UNF-2B
687	30+	DOT-E 10945	TC SU-5141	3000	207	515	8.44	6.82	173.2	20.44	519.18	8.3	3.76	.750-16 UNF-2B
603	45	DOT-E 10945	TC SU-5141	4500	310	416	6.82	6.86	174.24	18.2	462.28	9.3	4.23	.875-14 UNF-2B
695	45	DOT-E 10945	TC SU-5141	4500	310	412	6.75	6.32	160.5	20.47	519.94	9.75	4.43	.875-14 UNF-2B
604	60	DOT-E 10945	TC SU-5141	4500	310	550	9.01	7.19	182.6	21.2	538.48	12.2	5.53	.875-14 UNF-2B

NOTE: Specifications are approximate and subject to change without notice. "Approx. Duration (min)" is common industry jargon and is intended to draw a comparison to competitive products only. Duration specifications should not be considered as literal as the duration of each cylinder is predicated on the breathing rate of the user.

**HYDRO-STAT, INC.**

email: [rnickels@hydrostat.com](mailto:rnickels@hydrostat.com)  
 1111 SW 1st Way • Deerfield Beach, FL 33441  
 954.428.7677

